

# STRINGO®

THE ORIGINAL VEHICLE MOVER



## Stringo S2

THE STRENGTH YOU NEED  
WHEN YOU NEED IT

The Stringo S2 is intended for those seeking a reliable and flexible vehicle mover. The machine has everything you need to move vehicles weighing up to **2 000 kg** (4 410 lb) efficiently. In common with its larger siblings in the S range, this model has a modern design, making it easier to move vehicles indoors.

**THE STRINGO S2** is the natural aid to small and medium-sized businesses, dealer showrooms, workshops, private collectors, etc., where fewer and shorter moves of lighter vehicles are required. The Stringo S2 has an operating time of five hours, improved ergonomics and greater safety for both the operator and the vehicles you want to move. The low drive unit provides excellent visibility during both loading and unloading. Thanks to our various add-on options and customizations, the Stringo S2 is a versatile machine with big possibilities.

“Every Stringo is adapted from creation according to its future owner’s specific needs.”

All Stringo Models can be equipped with a wide range of options in order to meet the customer's individual needs.

## Customized solutions

As a company, we have been around since the 1980-ties and have many years worth of experience in the vehicle moving equipment industry and are experts in adapting our vehicle moving equipment to fully meet the specific needs of our customers.

The Stringo series is designed to work to it's full capacity when customized to the environment it is intended to serve, as well as the type of cars it is intended to transport. We are here to help you obtain a Stringo model accommodated to your needs. Our standard is customized.

### Technical Data **Stringo S2**

#### WEIGHT INFORMATION

|                                |                     |
|--------------------------------|---------------------|
| Service weight                 | 365 kg / 805 lb     |
| Max load – vehicle axle weight | 1 200 kg / 2 645 lb |
| Train weight                   | 2 365 kg / 5 214 lb |

#### ELECTRIC SYSTEM

|              |       |
|--------------|-------|
| Motor output | 800 W |
|--------------|-------|

#### BATTERY

|                  |               |
|------------------|---------------|
| Battery type     | AGM           |
| Battery capacity | 2 x 75 Ah C20 |

#### PERFORMANCE

|                       |  |
|-----------------------|--|
| Speed                 | Dual speed<br>0-3 km/h / 1.9 mph<br>and 0-6 km/h / 3.7 mph |
| Operating time/Charge | 5h   |


#### WHEEL SYSTEM

|             |                                     |
|-------------|-------------------------------------|
| Drive wheel | Ø 250 x 80 mm /<br>Ø 9.85 x 3.15 in |
|-------------|-------------------------------------|

#### STANDARD DIMENSIONS

|                            |                     |
|----------------------------|---------------------|
| Length (A)*                | 1 743 mm / 68.50 in |
| Drive unit measurement (B) | 425 mm / 16.75 in   |
| Outside measurement (F)    | 1 750 mm / 68.90 in |
| Inside measurement (G)     | 1 030 mm / 40.60 in |

\* Telescopic function adds additional 400 mm / 15.80 in

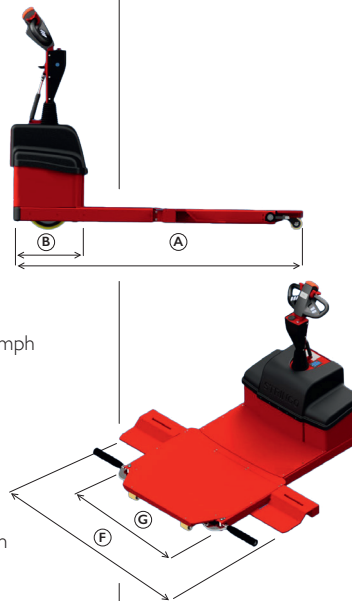

## Options



#### RIDE-ON PLATFORM

Can be lowered to enable the operator to ride on it during longer movements.



#### AUTOMATIC OVERROLL PROTECTION

Automatically prevents the wheel sets from rolling over the press arms.



#### FOOT PROTECTION

Mounted around the bottom of the drive unit to minimize the risk of foot injuries.

Few and short movements

**STRINGO S2**

Vehicles up to  
2 000 kg/4 410 lb

**STRINGO S3**

Vehicles up to  
3 000 kg/6 615 lb

**STRINGO 550**

Vehicles up to  
5 000 kg/11 020 lb

Frequent and/or long movements

FOR MORE PRODUCT INFORMATION AND CONTACT, PLEASE VISIT OUR WEBSITE AT [STRINGO.COM](http://STRINGO.COM)